




3/:12

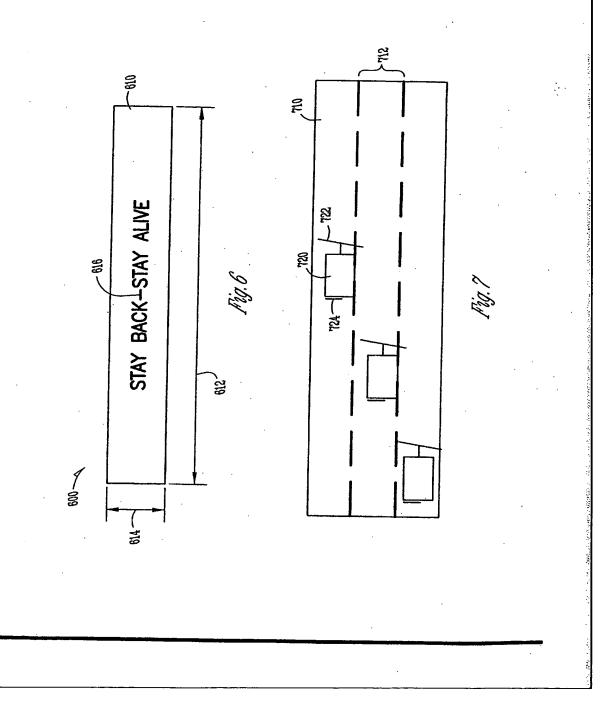

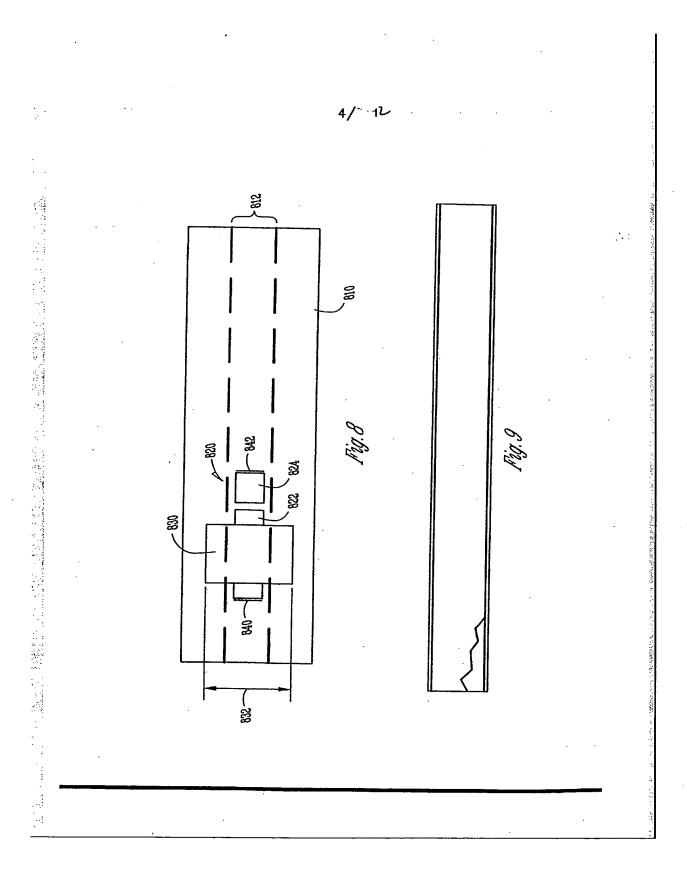


Lamp Baseline Assumptions: • Lamp Size: • Construction: • Lit Color: • Interconnection: • ITO Substrate Thickness: • Nominal Lamp Thickness: • Part Label: • Adhacing:	8.5" x 72" Hybrid Yellow has a yellow on/off color Crimp with Wires 6.007" (0.178mm) ess: 0.015" (0.38mm)
Adulesive.Insulator:Overprint:	None 0.0015" tape (a thicker laminate may be required for durabilit TBD
<u>Po</u>	Power Supply Specs
Driver	2-Amp or 5-Amp driver (120Vrm/60Hz input » 140Vrms/600Hz output)

5/ 12

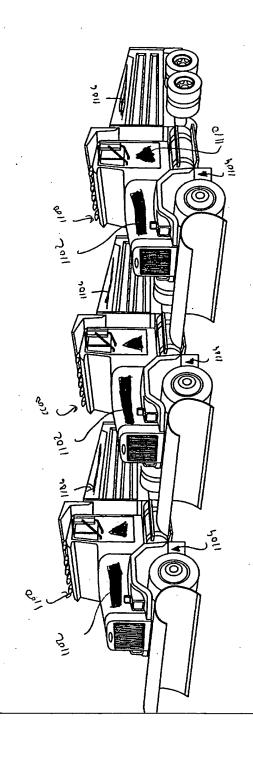

٦. ان

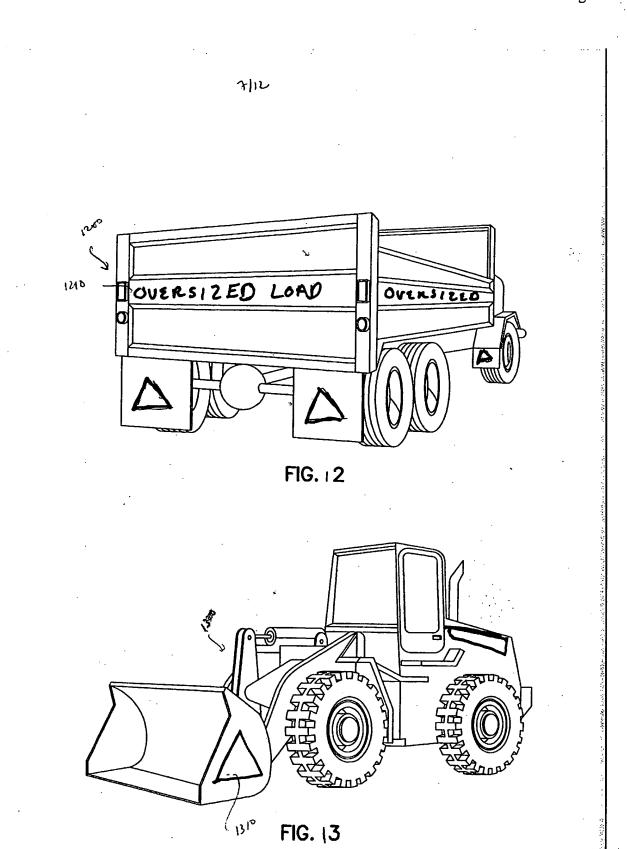

MIL

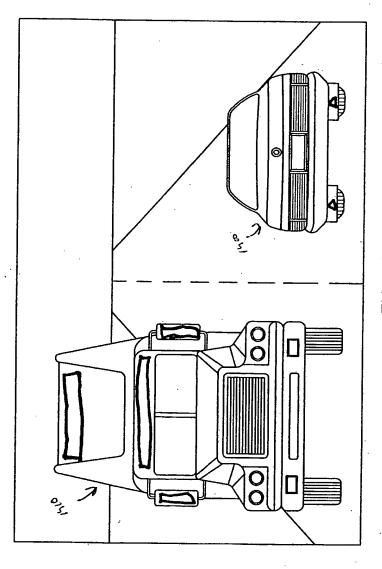
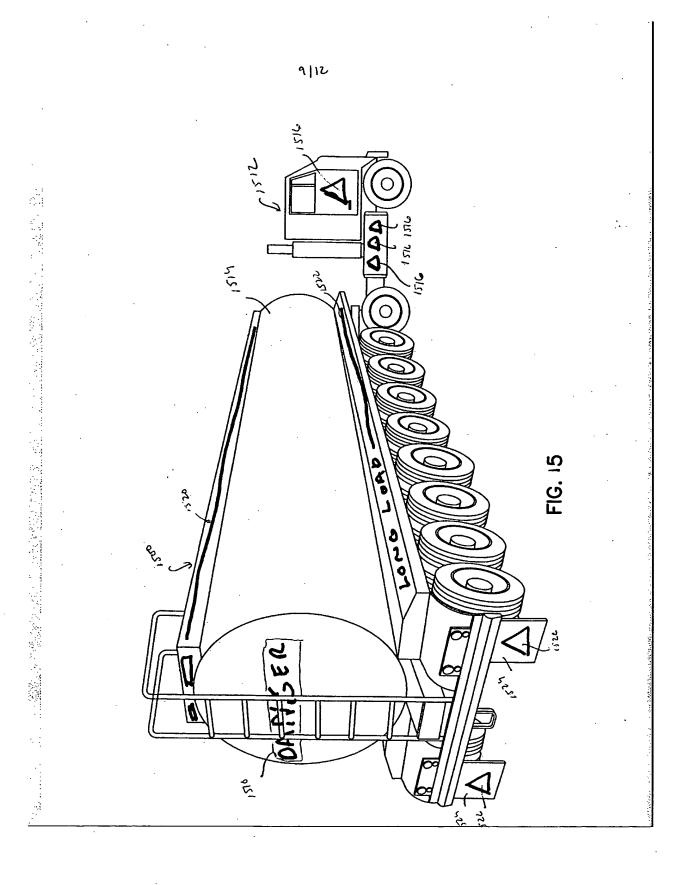


FIG. 14






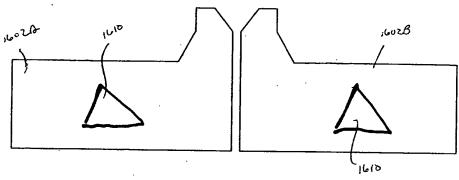


FIG. 16A

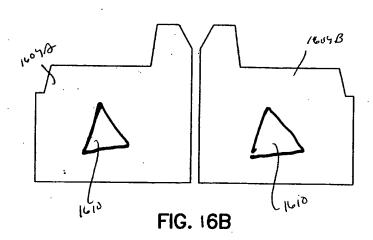

แบบ

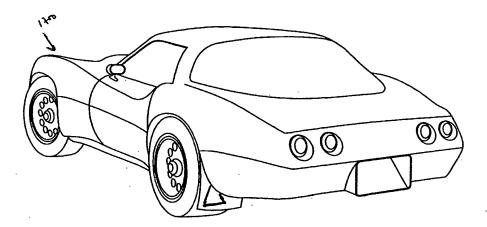


FIG. 17

•



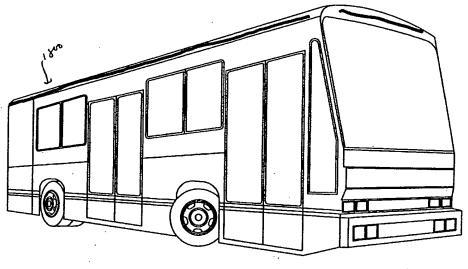


FIG. 19

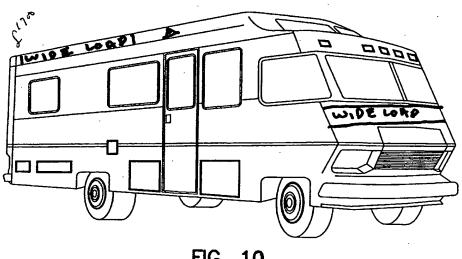


FIG. 19